



# Taśma GERLED® Professional IP20 SMD 5630 12V

GERLED® Professional LED strip  
IP20 SMD 5630 12V

GERLED® Professional striscio LED  
IP20 SMD 5630 12V

GERLED® Professional LED-Streifen  
IP20 SMD 5630 12V



Podwójna warstwa PCB

Double PCB laminate  
PCB a doppio laminate  
Doppelte PCB-Schicht



Stopień ochrony IP20

Protection class  
Grado di protezione (IP)  
IP-Klasse



3 lata gwarancji

3 years warranty  
3 anni di garanzia  
3 Jahre Garantie



Współczynnik oddawania barw

Color rendering index  
Indice di resa cromatica (Ra)  
Farbwiedergabeindex



Zgodność z CE

CE Compliance  
Conformità CE  
CE-Zertifikat



Żywotność

Life span  
Vitalità  
Lebensdauer



Kąt świecenia

Viewing angle  
Angolo luminoso  
Beleuchtungswinkel



Temperatura pracy

Operational temperature  
Temperatura d'esercizio  
Arbeitstemperatur



Temperatura magazynowania

Storage temperature  
Temperatura di stoccaggio  
Lagertemperatur



Zgodność z RoHS


RoHS Compliance  
Conformità RoHS  
RoHS-Zertifikat

KOD PRODUKTU PRODUCT CODE CODICE PRODOTTO PRODUKTCODE	BARWA LIGHT COLOR COLORE FARBE	TEMPERATURA BARWOWA COLOR TEMPERATURE TEMPERATURA DI COLORE FARBTEMPERATUR	ILOŚĆ DIOD LED QUANTITY NUMERO DIODI ANZAHL DER LEDS	POBÓR MOCY POWER CONSUMPTION POTENZA NENNLEISTUNG	STRUMIEN ŚWIETLNY LUMINOUS FLUX FASCIO LUMINOSO LICHSTROM
05TS12GW03056BC008	BIAŁY CIEPŁY WARM WHITE BIANCO CALDO WARMWEISS	2900K-3100K	60 LED/m	14,4 W/m	1710 lm/m
05TS12GW06056BC008			120 LED/m	28,8 W/m	2663 lm/m
05TS12GW03056BN008	BIAŁY NEUTRALNY NEUTRAL WHITE BIANCO NATURALE NEUTRALWEISS	3900K-4300K	60 LED/m	14,4 W/m	1762 lm/m
05TS12GW06056BN008			120 LED/m	28,8 W/m	2945 lm/m
05TS12GW03056BZ008	BIAŁY ZIMNY COOL WHITE BIANCO FREDDO KALTWEISS	6000K-6500K	60 LED/m	14,4 W/m	1850 lm/m
05TS12GW06056BZ008			120 LED/m	28,8 W/m	2780 lm/m

## 60 LED/m



sekcja cięcia co 50 mm (3 diody)  
cut section every 50 mm (3 diodes)  
sezione di taglio ogni 50 mm (3 diodi)  
Schnittabschnitt alle 50 mm (3 LEDs)

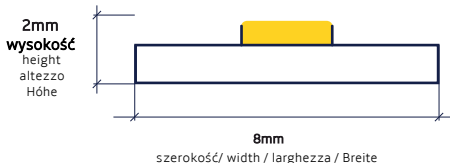

## 120 LED/m



sekcja cięcia co 50 mm (6 diod)  
cut section every 50 mm (6 diodes)  
sezione di taglio ogni 50 mm (6 diodi)  
Schnittabschnitt alle 50 mm (6 LEDs)

